


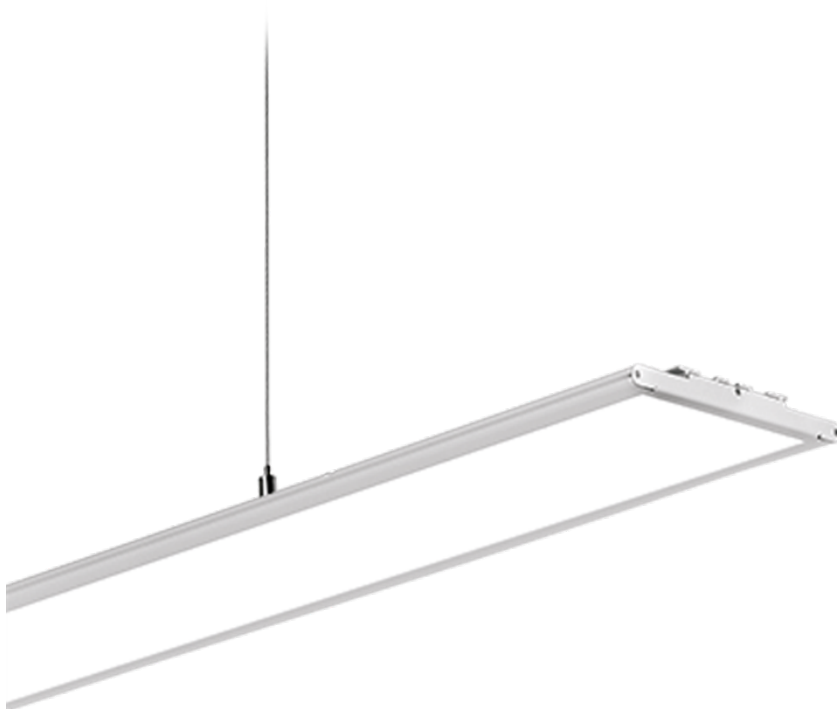

Product Description: VersiTile[™] 40W 1200 x 150mm Interconnectable Panel

Range of interconnectable suspended edge-lit VersiTile[™] LED light panels both non-dimmable and dimmable. Fitted with high transmission diffuser for minimal glare. Lightweight slim aluminium frame in RAL9016 White finish. Supplied with remote LED driver.

SKU Code	Wattage	Colour	Lumens	Lumens/Watt	Beam Angle	Finish Colour	SKU Type
AU-LP107A/40	40	4000	3500	88	120	White	Non Dimmable
AU-LP107A/40D	40	4000	3500	88	120	White	DALI Dimmable

Line Drawing

Polar Curve

Colour

Feature & Benefits

- Interconnectable suspended LED flat panel for office and commercial lighting
- Non-dimmable, 1-10V dimmable version available
- (L70) at a 40,000 hour lifetime
- 5 Year Warranty - see www.auroralighting.com for details

Product Specs:

Input Voltage	200~240V AC
Power Factor	0.9
Lifetime L70 (hrs)	40000hrs
Length (mm)	1200
Height (mm)	10
Operating Temp. (Max) °C	25°C

Input Frequency	50/60HZ
IP Rating	IP20
Width (mm)	150
Weight (Kg)	3.820
Product Type	Panels

Compliance & Approvals:



Warranty:

This product has a warranty period of 5 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.