



Product Description: Apex[™] Retail Wallwasher


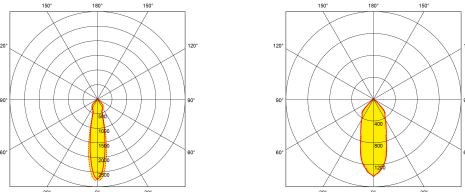

Adjustable recessed wallwasher designed to highlight displays and wall features. Perfect for applications that require high quality light output. Adjustable rotate and tilt angles to adapt to changing environments. Producing 3500 lumens from 30W LED, it is the perfect replacement for 35W metal halide.



SKU Code	Colour	Lumens	Lumens/Watt	Wattage	Beam Angle	Finish Colour	SKU Type
EN-RSP324/30	3000	3200	107	30	24	White	Non Dimmable
EN-RSP324/40	4000	3500	117	30	24	White	Non Dimmable
EN-RSP324BLK/30	3000	3200	107	30	24	Black	Non Dimmable
EN-RSP324BLK/40	4000	3500	117	30	24	Black	Non Dimmable
EN-RSP324DA/40	4000	3500	117	30	24	White	DALI Dimmable
EN-RSP324DABLK/40	4000	3500	117	30	24	Black	DALI Dimmable
EN-RSP324V/40	4000	3500	117	30	24	White	1-10V Dimmable
EN-RSP324VBLK/40	4000	3500	117	30	24	Black	1-10V Dimmable
EN-RSP345/30	3000	3200	107	30	45	White	Non Dimmable
EN-RSP345/40	4000	3500	117	30	45	White	Non Dimmable
EN-RSP345BLK/30	3000	3200	107	30	45	Black	Non Dimmable
EN-RSP345BLK/40	4000	3500	117	30	45	Black	Non Dimmable
EN-RSP345DA/40	4000	3500	117	30	45	White	DALI Dimmable
EN-RSP345DABLK/40	4000	3500	117	30	45	Black	DALI Dimmable
EN-RSP345V/40	4000	3500	117	30	45	White	1-10V Dimmable
EN-RSP345VBLK/40	4000	3500	117	30	45	Black	1-10V Dimmable

Line Drawing

Polar Curve

Colour

Black
White

Feature & Benefits

- High power COB LED wallwasher, designed for retail and commercial applications
- Rotates 350° with a horizontal adjustment 35° available with 24° and 45° beam angles
- No UV from the LED light source prevents stock fade and discolouration
- Supplied with remote LED driver
- 1.5kV surge protection
- 3 year warranty

Product Specs:

Input Voltage	200~240V AC	Input Frequency	50/HZ
Power Factor	0.9	IP Rating	IP20
Lifetime L70 (hrs)	40000	Overall Diameter (mm)	180
Lamp Base	None	Cutout Diameter (mm)	170
Weight (Kg)	1.048	Product Type	Wallwasher
Operating Temp. (Min) °C	-20°C	Operating Temp. (Max) °C	45°C
Height (mm)	129		

Compliance & Approvals:



Warranty:

This product has a warranty period of 3 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.