


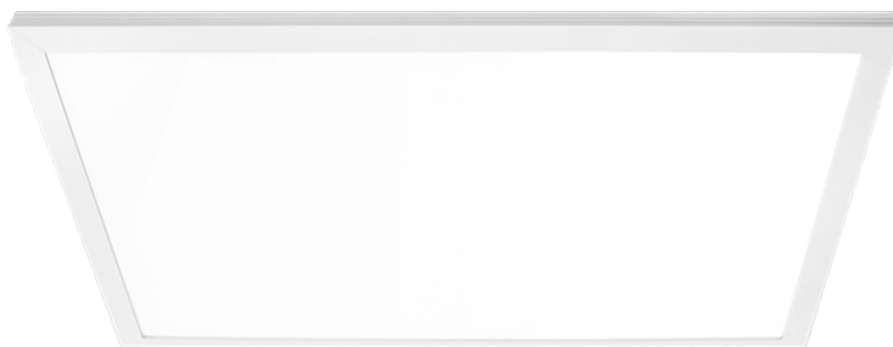


Product Description: EdgeLite™ 600 x 600mm 30W LED Flat Panel


EdgeLite™ range delivers an industry leading 110lm/W, producing over 60% energy savings compared to traditional fluorescent. A superior level of construction results in an IP44 rating as standard for damp environments.

SKU Code	Wattage	Colour	Lumens	Lumens/Watt	Beam Angle	Finish Colour	SKU Type
EN-FPRO6060/30	30	3000	3300	110	110	White	Non Dimmable
EN-FPRO6060/40	30	4000	3300	110	110	White	Non Dimmable
EN-FPRO6060/40/BLK	30	4000	3300	110	110	White	Non Dimmable
EN-FPRO6060/50	30	5000	3300	110	110	White	Non Dimmable
EN-FPRO6060DA/30	30	3000	3300	110	110	White	DALI Dimmable
EN-FPRO6060DA/40	30	4000	3300	110	110	White	DALI Dimmable
EN-FPRO6060DA/50	30	5000	3300	110	110	White	DALI Dimmable
EN-FPRO6060DAP/30	30	3000	3300	110	110	White	DALI Push DIM
EN-FPRO6060DAP/40	30	4000	3300	110	110	White	DALI Push DIM
EN-FPRO6060V/30	30	3000	3300	110	110	White	1-10V Dimmable
EN-FPRO6060V/40	30	4000	3300	110	110	White	1-10V Dimmable
EN-FPRO6060V/50	30	5000	3300	110	110	White	1-10V Dimmable


Line Drawing



Polar Curve



Colour



White

Feature & Benefits

- Edge-lit design and optical pattern light guide engineered for even light distribution
- Suitable for installation in 15 & 24mm T-bar ceilings
- RAL2016
- SDCM <4 providing consistent light colour quality
- IP44 rated from the front
- UGR 19 (Unified Glare Rating) - suitable for use in offices
- Flicker free driver - Power Factor >0.9
- 1-10V dimmable, DALI and emergency versions available
- Surface mount box, ceiling recess box and adjustable suspension kit available
- 1.5kV surge protection
- 5 year warranty

Product Specs:

Input Voltage	220~240V AC	Input Frequency	50/60HZ
Power Factor	0.9	IP Rating	IP44
Lifetime L70 (hrs)	50000hrs	Lamp Base	None
Width (mm)	595	Length (mm)	595
Weight (Kg)	2.792	Height (mm)	10
Product Type	Panels	Operating Temp. (Min) °C	-10°C
Operating Temp. (Max) °C	40°C		

Compliance & Approvals:



Warranty:

This product has a warranty period of 5 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.