




Product Description:

Modi[™] 29W Dimmable Downlight

Fixed, dimmable 29W IP20 LED downlight. Die-cast aluminium with frosted polycarbonate diffuser, designed to replace traditional PL downlights. Driver options include Mains, Dali and 1-10V dimmable drivers (sold separately). Suitable for cut-out of 200mm. Emergency and Baffled versions available. Interchangeable bezels available in round, square and drop glass options.

SKU Code	Wattage	Colour	Lumens	Lumens/Watt	Beam Angle	Finish Colour	SKU Type
AU-DL23029/40	29	4000	2510	87	90	Black	Non Dimmable
AU-DL23029/40D	29	4000	2510	87	90	Black	DALI Dimmable
AU-DL23029/40V	29	4000	2510	87	90	Black	1-10V Dimmable

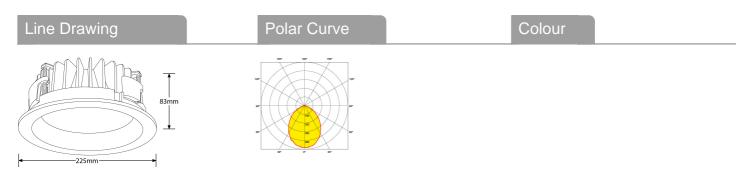

Feature & Benefits

- Range of energy efficient LED • downlights
- Accessories include drop glass, round and square bezels

• including Mains, Dali and 1-10V

Multiple driver options available • Ideal for corridors, circulation areas and reception areas

• 3 year warranty

Product Specs:

Input Voltage	220~240V AC
Power Factor	0.9
Lifetime L70 (hrs)	35000hrs
Height (mm)	83
Cutout Diameter (mm)	200-
Operating Temp. (Max) °C	25°C

Input Frequency	50/60HZ
IP Rating	IP20
Overall Diameter (mm)	225
Product Type	Downlights
Operating Temp. (Min) °C	-20°C

Compliance & Approvals:



This product has a warranty period of 3 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.