




Product Description: Eclips 14W Fixed Downlight


Part of the Eclips range, the 14W Fixed COB LED Downlights are ideal for commercial lighting installations, including circulation and break out areas. With a lumen package of 1280lm, spaces are further enhanced by applying Eclips accessories such as Mirror, Black or Silver Matt baffles, Honeycomb attachments or colour filters. Supplied with CRI80 as standard and SDCM<3, clients can also opt for CRI90 options to further enhance colour quality of the installation. Beam angles include 15°, 24°, 36° and 60°. L70 is 50,000 hrs.

SKU Code	Wattage	Colour	Lumens	Lumens/Watt	Beam Angle	Finish Colour
AU-EC14F1DTAK/30	14	3000	1280	92	15	White
AU-EC14F1DTAK/40	14	4000	1280	92	15	White
AU-EC14F1EMNDAK/30	14	3000	1280	92	15	White
AU-EC14F1EMNDAK/40	14	4000	1280	92	15	White
AU-EC14F1NDAK/30	14	3000	1280	92	15	White
AU-EC14F1NDAK/40	14	4000	1280	92	15	White
AU-EC14F2DTAK/30	14	3000	1280	92	24	White
AU-EC14F2DTAK/40	14	4000	1280	92	24	White
AU-EC14F2EMNDAK/30	14	3000	1280	92	24	White
AU-EC14F2EMNDAK/40	14	4000	1280	92	24	White
AU-EC14F2NDAK/30	14	3000	1280	92	24	White
AU-EC14F2NDAK/40	14	4000	1280	92	24	White
AU-EC14F3DTAK/30	14	3000	1280	92	36	White
AU-EC14F3DTAK/40	14	4000	1280	92	36	White
AU-EC14F3EMNDAK/30	14	3000	1280	92	36	White
AU-EC14F3EMNDAK/40	14	4000	1280	92	36	White
AU-EC14F3NDAK/30	14	3000	1280	92	36	White
AU-EC14F3NDAK/40	14	4000	1280	92	36	White
AU-EC14F6DTAK/30	14	3000	1280	92	60	White
AU-EC14F6DTAK/40	14	4000	1280	92	60	White
AU-EC14F6EMNDAK/30	14	3000	1280	92	60	White
AU-EC14F6EMNDAK/40	14	4000	1280	92	60	White
AU-EC14F6NDAK/30	14	3000	1280	92	60	White
AU-EC14F6NDAK/40	14	4000	1280	92	60	White

Line Drawing



Polar Curve

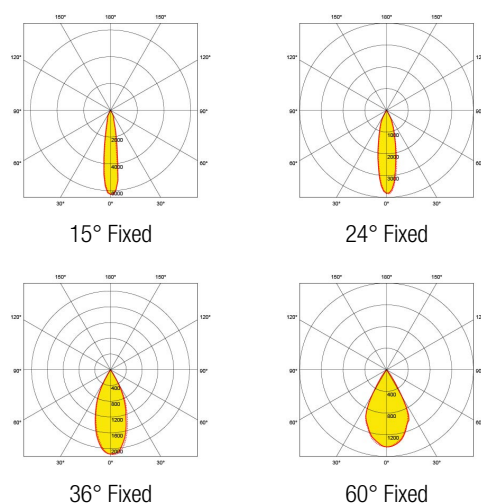

Colour

Feature & Benefits

- Non Dimmable
- CRI 80 (Selected CRI 90 options available)
- SDCM < 3
- Beam angles available in 36°, 60° with 15° & 24° to special order
- Baffle/Filter/Reflector accessories available
- Ideal for Commercial and Hospitality
- 5 Year Warranty

Product Specs:

Input Voltage	220~240V AC	Input Frequency	50/60HZ
Power Factor	0.95	IP Rating	IP20
Lifetime L70 (hrs)	50000hrs	Overall Diameter (mm)	113
Cutout Width (mm)	100	Height (mm)	106
Product Type	Downlights	Cutout Diameter (mm)	100-105
Operating Temp. (Min) °C	-20°C	Operating Temp. (Max) °C	50°C

Compliance & Approvals:

Warranty:

This product has a warranty period of 5 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.