


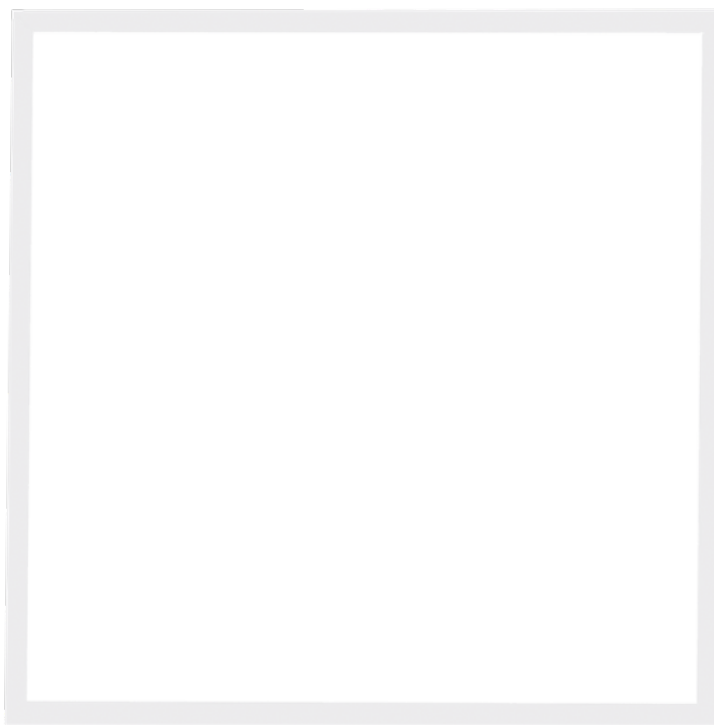

Product Description:


Versitile™ 38W 500 x 500mm IP65 Non-Dimmable Panel

Highly efficient award winning edge-lit non-dimmable Versitile™ LED light panel. Fitted with high transmission diffuser for minimal glare. Lightweight slim aluminium frame in RAL9016 White finish. IP rating of IP65 from front and back (Driver and connections IP20). Suitable for installations in 15 and 24mm T-bar ceilings. May also be surface mounted or suspended. Fitted with a connector to easily connect the light panel and the driver. Supplied with remote LED driver.


5 year warranty.

SKU Code	Wattage	Colour	Lumens	Lumens/Watt	Beam Angle	Finish Colour	SKU Type
AU-LP200C/30	38	3000	3600	95	120	White	Non Dimmable
AU-LP200C/30D	38	3000	3600	95	120	White	DALI Dimmable
AU-LP200C/30DEM	38	3000	3600	95	120	White	DALI Emergency
AU-LP200C/30EM	38	3000	3600	95	120	White	Emergency
AU-LP200C/40	38	4000	3900	103	120	White	Non Dimmable
AU-LP200C/40D	38	4000	3900	103	120	White	DALI Dimmable
AU-LP200C/40DEM	38	4000	3900	103	120	White	DALI Emergency
AU-LP200C/40EM	38	4000	3900	103	120	White	Emergency

Line Drawing



Polar Curve



Colour

Feature & Benefits

- Edge lit design provides superior light performance and uniformity ideal for offices and commercial lighting
- High transmission diffuser drastically reduces uncomfortable glare, Achievable UGR 19
- Heatsink rapidly dissipates heat through rear of fitting
- Dimmable and CX colour exchange version available to set the desired light environment
- IP65 front – suitable for use in commercial kitchens, health care and similar environments
- Suitable for installation in 15 & 24mm T-bar ceilings
- Panel frame RAL9016 White
- High colour rendering index (Ra) 80
- SDCM <4 providing consistent light colour quality
- DALI and Emergency options available
- (L70) at a 50,000 hour lifetime
- 5 Year Warranty - see www.auroralighting.com for details

Product Specs:

Input Voltage	220~240V AC	Input Frequency	50/60HZ
Power Factor	0.9	IP Rating	IP65
Lifetime L70 (hrs)	50000hrs	Width (mm)	498
Length (mm)	498	Weight (Kg)	2.818
Height (mm)	9.5	Product Type	Panels
Operating Temp. (Min) °C	-40°C	Operating Temp. (Max) °C	25°C

Compliance & Approvals:



Warranty:

This product has a warranty period of 5 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.