


Product Description:

Product Image:

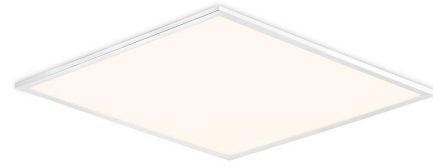

Product Features:


- Edge lit design provides superior lighting performance and uniform light output across the surface
- High transmission diffuser drastically reduces uncomfortable glare which can cause eye strain in well-lit offices
- Dimmable and CX colour exchange version available to set the desired light environment
- UGR (unified glare rating) - 19 - perfect for use in offices
- Heatsink rapidly dissipates heat through rear of fitting
- 110-265V voltage range suitable for worldwide installation
- Dimmable (1-10V) and CX options also available
- IP44 from below – suitable for use in commercial kitchens, health care etc (recessed)
- Up to x3 longer life than triphosphor fluorescent
- Suitable for installation in 15 & 24mm T-bar ceilings
- May also be surface mounted or suspended
- Panel frame RAL9016 White
- High colour rendering index (Ra) 80 – ErP Compliant
- DALI options available, please call sales office for details
- (L70) at a 40,000 hour lifetime
- 5 Year Warranty - see www.auroralighting.com for details

Versatile™ 38W IP44 500 x 500mm Dimmable Panel


Product Specs:

Technology	LED	Input Voltage	220~240V AC
LED Chip	5630	Number of LEDs	108
Positional Adjustment	Fixed	Input Frequency	50/60HZ
Lifetime L70 (hrs)	40000	Power Factor	0.9
Dimmable	Yes	Luminaire Distribution	Direct
Positional Adjustment	Fixed	IP Rating	IP44
SDCM	4	Dali	Yes
Operating Env. Temp. (Max) °C	25°C	Optic Material	PS
Length (mm)	498	Width (mm)	498
Recess Depth (mm)	12	Weight (Kg)	3.090

Line Drawing

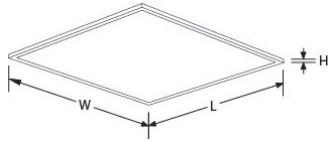

Polar Curve

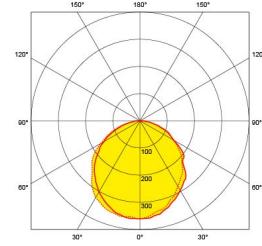

SKU Table and Ordering:

SKU Code	Wattage	Colour	Lumens	Lumens/Watt	Beam Angle	Finish Colour
AU-LP201B/30	38	3000	3600	95	120	White
AU-LP201B/30EM	38	3000	3600	95	120	White
AU-LP201B/40	38	4000	3900	103	120	White
AU-LP201B/40EM	38	4000	3900	103	120	White

Compliance & Approvals:



Warranty:

This product has a warranty period of 1 Year. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.