


Product Description:

The UniPac™ range of anti-corrosives is the perfect cost effective solution to replace traditional T8 fluorescent fittings. Formed from a single polycarbonate body and using high lumen LED chips, it's engineered for installation in the most challenging environments making the decision to switch to LED that much easier. Also available with microwave sensor and corridor function.

Product Image:

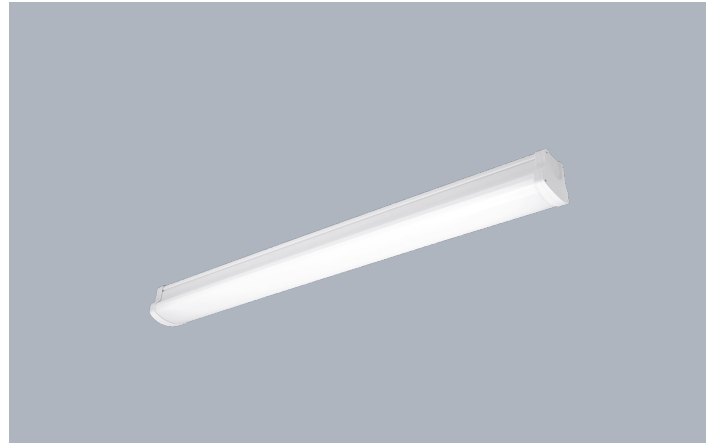


LED anticorrosivo 1500mm 54W IP65 de policarbonato


Product Features:

- Carcasa de policarbonato IP65 antivandálica y difusor de ópalo que proporciona una distribución de luz suave y uniforme sin puntos calientes
- Ideal para aplicaciones interiores y exteriores, p. aparcamientos
- Coloque los terminales de ajuste en ambos extremos para el cableado de cables pasante y una instalación rápida y fácil
- Golpeos de entrada de conducto de 20 mm en cada tapa de extremo
- Se suministra con clips de montaje y prensaestopas
- Rango de detección del sensor de microondas de hasta 12 metros
- Detección de luz a 30 lux a menos que esté deshabilitada
- Tiempo de mantenimiento ajustable de 5 segundos a 10 minutos
- Calificación de impacto IK08
- Protección contra sobretensiones de 1.5kV
- Garantía de 3 años

Line Drawing Image

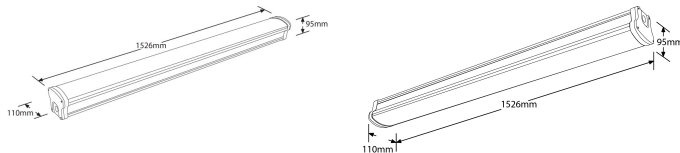

Polar Curve Image



Product Specs:

Technology	LED	Number of LEDs	264
Luminaire Distribution	Directo	Lifetime L70 (hrs)	25000
Input Voltage	100~240V AC	Input Frequency	50/60HZ
Dimmable	No	IP Rating	IP65
IK Rating	IK08	Operating Env. Temp. (Min) °C	-20
Operating Env. Temp. (Max) °C	40	Optic Material	PC
Power Factor	0.9	Lamp Base	otro
Height (mm)	95	Length (mm)	1526
Width (mm)	110	Surge Protection (kV)	1.5
SDCM	6		

SKU Table and Ordering

SKU Code	Wattage	Lumens	Lumens/Watt	Colour	Beam Angle	Ra	SDCM
EN-ANTE554/40	54	4900	90.74	4000	120	80	6
EN-ANTE554/40EM	54	4900	90.74	4000	120	80	6
EN-ANTE554/40MS	54	4900	90.74	4000	120	80	6
EN-ANTE554/40MSC	54	4900	90.74	4000	120	80	6

Compliance & Approvals:



Warranty

This product has a warranty period of 3 años. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

UK Enlite Sales & Distribution
Apex Park
6 Little Burrow
Welwyn Garden City AL7 4SW
United Kingdom
Tel : +44 (0) 1707 35 18 20