




Product Description:

Axio Linium Standard Emergency Pack

Emergency pack. This modular pack can be added to any Axio Linium luminaire, without the use of tools. Standard 3 hour maintained emergency pack containing 3.2V 4.5Ah LiFe PO4 Cells. Has unique light pipe design for the green charging indicator. When the module is connected the green light is clearly visible from below even when fitting is installed at a height of 5m from the ground.

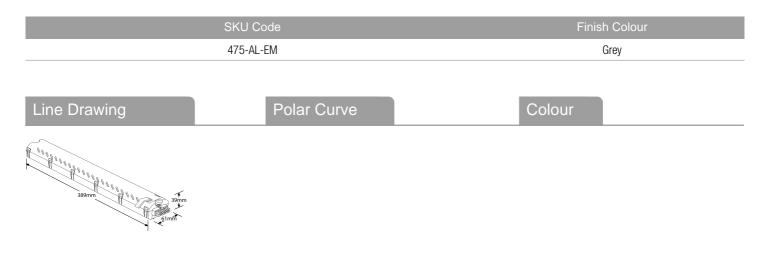

Feature & Benefits

• Modular: retro fit to any Axio Linium luminaire in the run Standard 3 hour maintained emergency pack containing 3.2V 4.5Ah LiFe P04 Cells • Unique light pipe design for the green charging indicator.

| D | r٢ | bd | | ct. | S | n | Δ | CS: | |
|---|-----|----|---|-----|---|---|---|-----|--|
| | I C | JU | u | υı | | Р | C | 03. | |

| Input Voltage | 230~240V AC/DC | Width (mm) | 61 |
|---------------|----------------|-----------------------|-------|
| Length (mm) | 389 | Height (mm) | 39 |
| Weight (Kg) | 0.5 | Positional Adjustment | Fixed |

Compliance & Approvals:



Warrantv:

This product has a warranty period of 4 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.